



VIVAX
METROTECH

indepthTM
UTILITY SOLUTIONS
281-969-8530


25-Watt Transmitter Loc3 Series Transmitter

- 4 Amp peak current output
- 130 Volts peak output
- Light and portable for everyday use
- ELF and Low frequencies available minimum distortion
- Signal clamp compatibility

This powerful **25-watt transmitter** is the go-to transmitter for cable fault locating, finding holidays on coated pipes, problematic deep-buried lines, and long-distance pipe and cable locating. The Loc3-25Tx is also well suited for applications for cathodic protected longline pipelines and gas distribution in city areas needing a low-frequency high output transmitter.

The Loc3-25Tx transmitter has selectable direct connection frequencies from 32Hz to 9.82kHz and signal clamp frequencies from 8kHz to 9.82kHz. The two-inch by one-inch dot matrix display with LED backlight shows the user output current, volts, frequency and user feedback warnings.

The Loc3-25Tx is packaged in a rugged, ergonomic IP54 housing and is lightweight at only 7.05lbs (3.19kg). The transmitter provides consistent current output up to 4 Amps peak. The transmitter comes in a soft carry bag with a storage pocket for everyday accessories and can be operated while inside the carry bag.

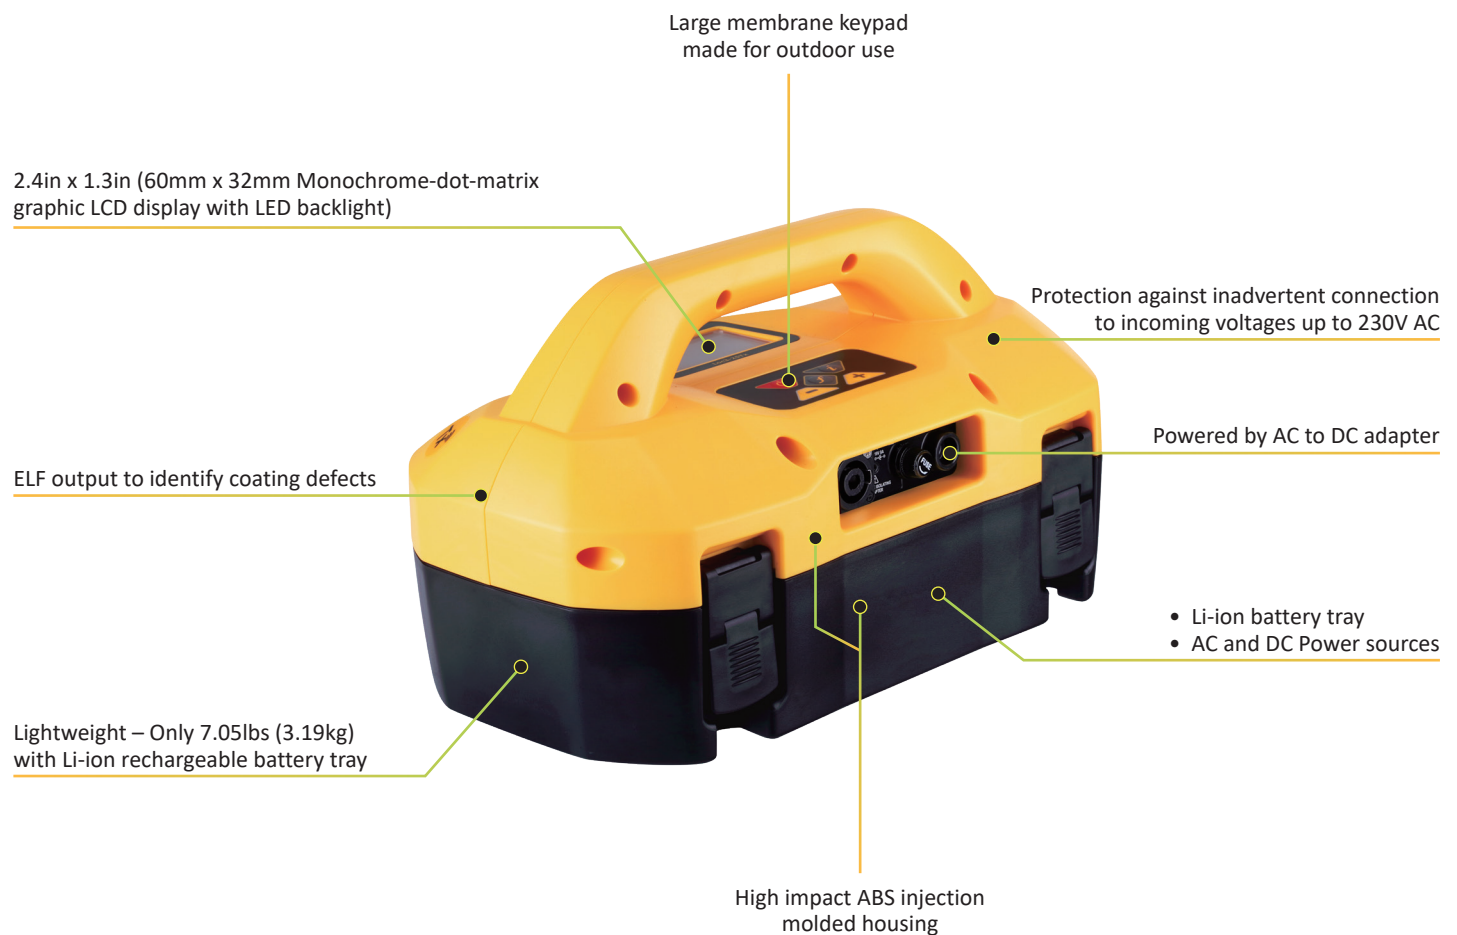

	Loc3-25Tx Transmitter Specifications		
Construction	High impact ABS injection molded housing		
Weight and Dimensions	7.05lbs (3.19kg), 13.1in(L) x 7.2in(W) x7.3in(H) (332mm x 182mm x 185mm)		
Display	2.4in x 1.3in (60mm x 32mm Monochrome-dot-matrix graphic LCD display with LED backlight		
Battery life	At 70°F (21°C) - continuous use (based on the battery type and quality)		
	Output Power	Alkaline	Li-ion (Rechargeable)
	10-watt	4 hours	6 hours
	25-watt	N/A	4 hours
	Li-ion batteries will withstand 500 charging life cycles When using Alkaline batteries, the output is limited to 10 watts Based on maximum output into 50-ohm load and 50% duty cycle		
Operating Frequencies	32Hz to 9.82kHz		
	ELF1 - 3Hz/6Hz/98Hz	3Hz/6Hz/512Hz	
	ELF2 - 3Hz/6Hz/128Hz	3Hz/6Hz/640Hz	
	ELF3 - 4Hz/8Hz/98Hz	4Hz/8Hz/512Hz	
	ELF4 - 4Hz/8Hz/128Hz	4Hz/8Hz/640Hz	
	3Hz/98Hz, 3Hz/128Hz, 4Hz/98Hz, 4Hz/128Hz		
Maximum Output Voltage	Maximum output voltage = 130V peak		
Maximum Output Current	4 Amps peak		
Environmental	IP54 and NEMA 4		

What's in the box



Compatible Products



vLoc3-DM



vLoc3-Pro



vLoc3-XLF



vLoc3 Accessory A-Frame



4" and 5" Signal Clamp

Local Vivax-Metrotech Distributor:

indepth™
UTILITY SOLUTIONS

4310 FM 2218 Rd
Richmond, TX 77469

Corp: (281) 969-8530

info@indepthUS.com

www.indepthUS.com

Vivax-Metrotech Corporation

3251 Olcott Street, Santa Clara, CA 95054, USA

Tel: +1-408-734-1400

www.vivax-metrotech.com



V1.1

Please visit our website for full product specifications.

www.indepthUS.com | info@indepthUS.com